



GuideWire Installation

When spanning distances where supporting the detection wire at the recommended intervals is not practical, a guide wire may be used. The guide wire is fastened using turnbuckles at each end of the span and using additional supports spaced at 15 to 20 ft. intervals. This helps reduce sag in the guide and detection wires. The gauge of the guide wire should be adequate for the distance spanned. Typically, distances up to 250 feet may be supported with 12AWG guide wire as long it is supported every 15 to 20 feet.



Turnbuckle

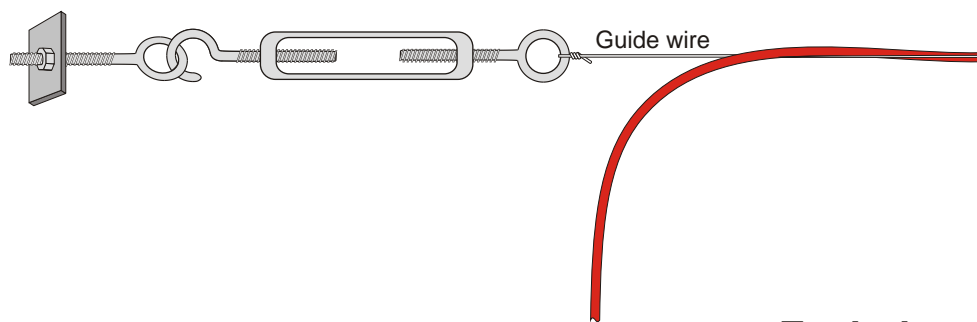

Eyebolt

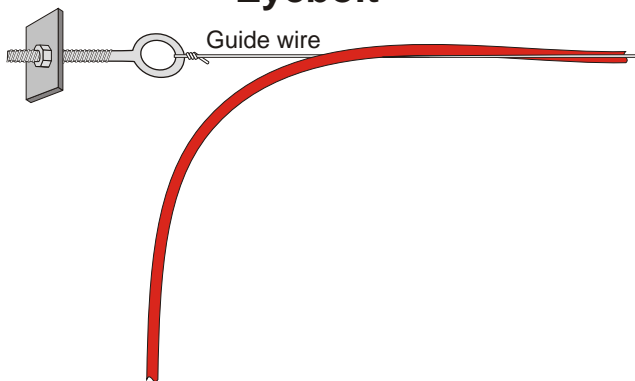

Eyebolt with Grommet

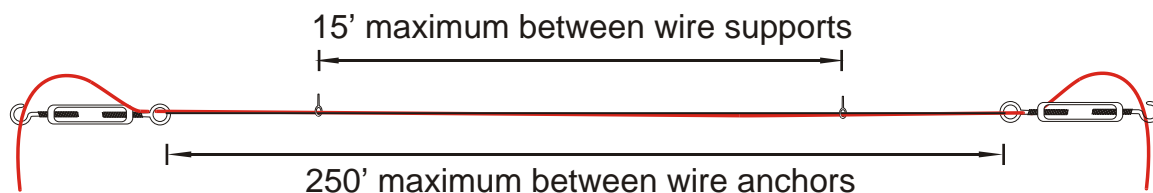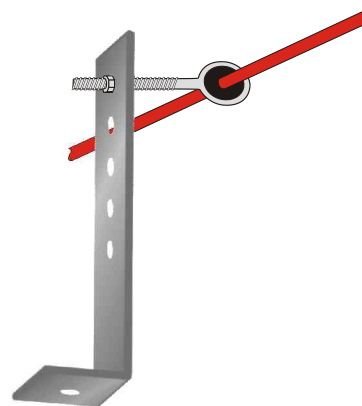

SAFE Fire Detection, Inc.
5915 Stockbridge Drive
Monroe, NC 28110
Phone: 704-821-7920
Fax: 704-821-4327

Satellite Offices in:

- Chicago, Illinois
- Hammond, Indiana
- Houston, Texas
- Los Angeles, California
- Toronto, Canada

E-mail: staff@safefiredetection.com • www.safefiredetection.com